




**JET FAST COMPANY., LIMITED.**  
 Jet Fast Co., Ltd. was established in 1979



## Capped Starlock for Imperial Round Shafts

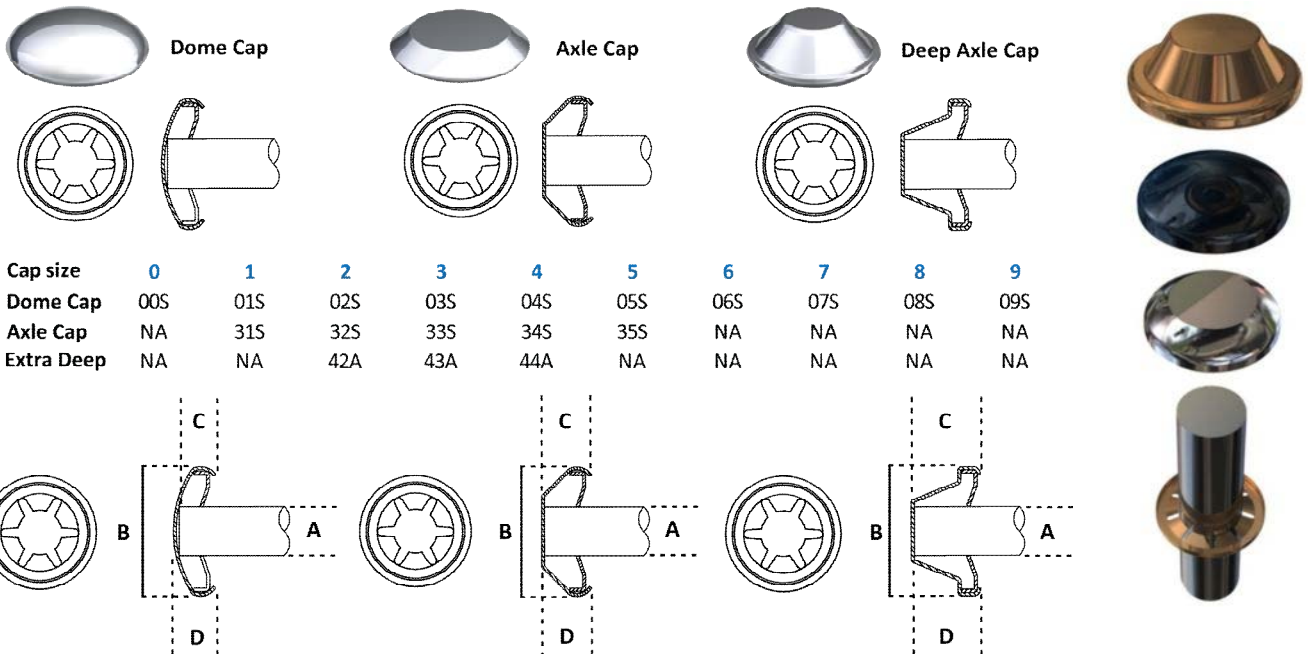

Cap size	0	1	2	3	4	5	6	7	8	9
Dome Cap	00S	01S	02S	03S	04S	05S	06S	07S	08S	09S
Axle Cap	NA	31S	32S	33S	34S	35S	NA	NA	NA	NA
Extra Deep	NA	NA	42A	43A	44A	NA	NA	NA	NA	NA

• Standard Capped starlock®.

- Non standard Capped Starlock® may be subject to minimum order quantity.
- Capped Starlock® fasteners are available in Stainless Steel (S) Zinc Plated Mild Steel (A).

## Capped Starlock for Imperial Round Shafts

A	B	C	D	Type of cap			Other Infor	Box QTY			
				Shaft Size	Part no.	Dome cap			Axle cap	Deep Axle	
1/16"	6339	.285"	NA	NA	.055"	.105"	0	S			5000
1/16"	6232	.420"	.420"	NA	.100"	.120"	1	S		V	1000
1/16"	6232	.420"	.420"	NA	.135"	.157"	1		S	V	1000



**JET FAST COMPANY., LIMITED.**  
*Jet Fast Co., Ltd. was established in 1979*



## Capped Starlock for Imperial Round Shafts

A Shaft Size	Part no.	B			C Shaft Penetration	D Height	Size of cap	Type of cap			Other Infor	Box QTY
		Dome cap	Axle cap	Deep Axle				Dome	Axle	Deep Axle		
3/32"	6333	.285"	NA	NA	.055"	.105"	0	S				5000
3/32"	6221	.420"	.420"	NA	.100"	.120"	1	S			V	1000
3/32"	6221	.420"	.420"	NA	.135"	.157"	1		S		V	1000
.104"	6892	.420"	.420"	NA	.100"	.120"	1	S				1000
.104"	6892	.420"	.420"	NA	.135"	.157"	1		S			1000
1/8"	7161	.285"	NA	NA	.055"	.105"	0	S				5000
1/8"	6222	.420"	.420"	NA	.100"	.120"	1	S			V	1000
1/8"	6222	.420"	.420"	NA	.135"	.157"	1		S		V	1000
.144"	6891	.420"	.420"	NA	.100"	.120"	1	S				1000
.144"	6891	.420"	.420"	NA	.135"	.157"	1		S			1000
5/32"	6223	.485"	.490"	.485"	.120"	.148"	2	S			V	1000
5/32"	6223	.485"	.490"	.485"	.160"	.175"	2		S		V	1000
5/32"	6223	.485"	.490"	.485"	.217"	.224"	2			A	V	1000
3/16"	8081	.420"	.420"	NA	.100"	.120"	1	S				1000
3/16"	8081	.420"	.420"	NA	.135"	.157"	1		S			1000
3/16"	6224	.485"	.490"	.485"	.120"	.148"	2	S			V	1000



**JET FAST COMPANY., LIMITED.**  
*Jet Fast Co., Ltd. was established in 1979*



## Capped Starlock for Imperial Round Shafts

A Shaft Size	Part no.	B			C Shaft Penetration	D Height	Size of cap	Type of cap			Other Infor	Box QTY
		Dome cap	Axle cap	Deep Axle				Dome	Axle	Deep Axle		
3/16"	6224	.458"	.490"	.458"	.160"	.175"	2		S		V	1000
3/16"	6224	.458"	.490"	.458"	.217"	.224"	2			A	V	1000
3/16"	7245	.458"	.490"	.458"	.120"	.148"	2	S				1000
3/16"	7245	.458"	.490"	.458"	.160"	.175"	2		S			1000
3/16"	7245	.458"	.490"	.458"	.217"	.224"	2			A		1000
3/16"	8073	.458"	.490"	.458"	.120"	.148"	2	S				1000
3/16"	8073	.458"	.490"	.458"	.160"	.175"	2		S			1000
3/16"	8073	.458"	.490"	.458"	.217"	.224"	2			A		1000
3/16"	7201	.640"	.640"	.635"	.160"	.200"	3	S				1000
3/16"	7201	.640"	.640"	.635"	.180"	.200"	3		S			1000
3/16"	7201	.640"	.640"	.635"	.264"	.283"	3			A		1000
3/16"	6680	.780"	.785"	.777"	.177"	.230"	4	S				1000
3/16"	6680	.780"	.785"	.777"	.216"	.235"	4		S			1000
3/16"	6680	.780"	.785"	.777"	.303"	.320"	4			A		1000
7/32"	6235	.485"	.490"	.485"	.120"	.148"	2	S			V	1000
7/32"	6235	.485"	.490"	.485"	.160"	.175"	2		S		V	1000



**JET FAST COMPANY., LIMITED.**  
 Jet Fast Co., Ltd. was established in 1979



## Capped Starlock for Imperial Round Shafts

A Shaft Size	Part no.	B			C Shaft Penetration	D Height	Size of cap	Type of cap			Other Infor	Box QTY
		Dome cap	Axle cap	Deep Axle				Dome	Axle	Deep Axle		
7/32"	6235	.485"	.490"	.485"	.217"	.224"	2			A	V	1000
7/32"	7155	.640"	.640"	.635"	.160"	.200"	3	S				1000
7/32"	7155	.640"	.640"	.635"	.180"	.200"	3		S			1000
7/32"	7155	.640"	.640"	.635"	.264"	.283"	3			A		1000
7/32"	8027	.780"	.785"	.777"	.177"	.230"	4	S				1000
7/32"	8027	.780"	.785"	.777"	.216"	.235"	4		S			1000
7/32"	8027	.780"	.785"	.777"	.303"	.320"	4			A		1000
1/4"	6225	.640"	.640"	.635"	.160"	.200"	3	S			V	1000
1/4"	6225	.640"	.640"	.635"	.180"	.200"	3		S		V	1000
1/4"	6225	.640"	.640"	.635"	.264"	.283"	3			A	V	1000
1/4"	7224	.640"	.640"	.635"	.160"	.200"	3	S				1000
1/4"	7224	.640"	.640"	.635"	.180"	.200"	3		S			1000
1/4"	7224	.640"	.640"	.635"	.264"	.283"	3			A		1000
1/4"	8052	.640"	.640"	.635"	.160"	.200"	3	S				1000
1/4"	8052	.640"	.640"	.635"	.180"	.200"	3		S			1000
1/4"	8052	.640"	.640"	.635"	.264"	.283"	3			A		1000



**JET FAST COMPANY., LIMITED.**  
*Jet Fast Co., Ltd. was established in 1979*



## Capped Starlock for Imperial Round Shafts

A Shaft Size	Part no.	B			C Shaft Penetration	D Height	Size of cap	Type of cap			Other Infor	Box QTY
		Dome cap	Axle cap	Deep Axle				Dome	Axle	Deep Axle		
1/4"	7159	.780"	.785"	.777"	.177"	.230"	4	S				1000
1/4"	7159	.780"	.785"	.777"	.216"	.235"	4		S			1000
1/4"	7159	.780"	.785"	.777"	.303"	.320"	4			A		1000
1/4"	8302	1.025"	1.028"	NA	.236"	.295"	5	S				500
1/4"	8302	1.025"	1.028"	NA	.270"	.285"	5		S			500
1/4"	8303	.485"	.490"	.485"	.120"	.148"	2	S				1000
1/4"	8303	.485"	.490"	.485"	.160"	.175"	2		S			1000
1/4"	8303	.485"	.490"	.485"	.217"	.224"	2			A		1000
9/32"	6236	.640"	.640"	.640"	.160"	.200"	3	S			V	1000
9/32"	6236	.640"	.640"	.640"	.180"	.200"	3		S		V	1000
9/32"	6236	.640"	.640"	.640"	.264"	.283"	3			A	V	1000
9/32"	7167	.780"	.785"	.777"	.177"	.230"	4	S				1000
9/32"	7167	.780"	.785"	.777"	.216"	.235"	4		S			1000
9/32"	7167	.780"	.785"	.777"	.303"	.320"	4			A		1000
9/32"	7168	1.025"	1.028"	NA	.236"	.295"	5	S				500
9/32"	7168	1.025"	1.028"	NA	.270"	.285"	5		S			500



**JET FAST COMPANY., LIMITED.**  
*Jet Fast Co., Ltd. was established in 1979*



## Capped Starlock for Imperial Round Shafts

A	Part no.	B			C	D	Size of cap	Type of cap			Other Infor	Box QTY
		Dome cap	Axle cap	Deep Axle				Shaft Penetration	Height	Dome		
9/32"	8028	1.505"	NA	NA	.343"	.460"	7	S				500
5/16"	6226	.640"	.640"	.635"	.160"	.200"	3	S			V	1000
5/16"	6226	.640"	.640"	.635"	.180"	.200"	3		S		V	1000
5/16"	6226	.640"	.640"	.635"	.264"	.283"	3			A	V	1000
5/16"	7169	.640"	.640"	.635"	.160"	.200"	3	S				1000
5/16"	7169	.640"	.640"	.635"	.180"	.200"	3		S			1000
5/16"	7169	.640"	.640"	.635"	.264"	.283"	3			A		1000
5/16"	8042	.640"	.640"	.635"	.160"	.200"	3	S				1000
5/16"	8042	.640"	.640"	.635"	.180"	.200"	3		S			1000
5/16"	8042	.640"	.640"	.635"	.264"	.283"	3			A		1000
11/32"	6238	.780"	.785"	.777"	.177"	.230"	4	S			V	1000
11/32"	6238	.780"	.785"	.777"	.216"	.235"	4		S		V	1000
11/32"	6238	.780"	.785"	.777"	.303"	.320"	4			A	V	1000
11/32"	8029	1.025"	1.028"	NA	.236"	.295"	5	S				500
11/32"	8029	1.025"	1.028"	NA	.270"	.285"	5		S			500
.365"	6233	.780"	.785"	.777"	.177"	.230"	4	S				1000



**JET FAST COMPANY., LIMITED.**  
*Jet Fast Co., Ltd. was established in 1979*



## Capped Starlock for Imperial Round Shafts

A Shaft Size	Part no.	B			C Shaft Penetration	D Height	Size of cap	Type of cap			Other Infor	Box QTY
		Dome cap	Axle cap	Deep Axle				Dome	Axle	Deep Axle		
.365"	6233	.780"	.785"	.777"	.216"	.235"	4		S			1000
.365"	6233	.780"	.785"	.777"	.303"	.320"	4			A		1000
3/8"	6227	.780"	.785"	.777"	.177"	.230"	4	S			V	1000
3/8"	6227	.780"	.785"	.777"	.216"	.235"	4		S		V	1000
3/8"	6227	.780"	.785"	.777"	.303"	.320"	4			A	V	1000
3/8"	7153	1.695"	NA	NA	.375"	.490"	9	S				500
13/32"	6239	.780"	.785"	.777"	.177"	.230"	4	S			V	1000
13/32"	6239	.780"	.785"	.777"	.216"	.235"	4		S		V	1000
13/32"	6239	.780"	.785"	.777"	.303"	.320"	4			A	V	1000
13/32"	7208	1.025"	1.028"	NA	.236"	.295"	5	S				500
13/32"	7208	1.025"	1.028"	NA	.270"	.285"	5		S			500
7/16"	6661	.780"	.785"	.777"	.177"	.230"	4	S				1000
7/16"	6661	.780"	.785"	.777"	.216"	.235"	4		S			1000
7/16"	6661	.780"	.785"	.777"	.303"	.320"	4			A		1000
7/16"	6228	1.025"	1.028"	NA	.236"	.295"	5	S			V	500
7/16"	6228	1.025"	1.028"	NA	.270"	.285"	5		S		V	500



## Capped Starlock for Imperial Round Shafts

A Shaft Size	Part no.	B			C Shaft Penetration	D Height	Size of cap	Type of cap			Other Infor	Box QTY
		Dome cap	Axle cap	Deep Axle				Dome	Axle	Deep Axle		
1/2"	6229	1.025"	1.028"	NA	.236"	.295"	5	S			V	500
17/32"	6237	1.025"	1.028"	NA	.270"	.285"	5		S		V	500
17/32"	6237	1.025"	1.028"	NA	.236"	.295"	5	S			V	500
17/32"	6237	1.025"	1.028"	NA	.270"	.285"	5		S		V	500
5/8"	8077	1.025"	1.028"	NA	.236"	.295"	5	S				500
5/8"	8077	1.025"	1.028"	NA	.270"	.285"	5		S			500
5/8"	6231	1.025"	1.028"	NA	.236"	.295"	5	S			V	500
5/8"	6231	1.025"	1.028"	NA	.270"	.285"	5		S		V	500
3/4"	8307	1.505"	NA	NA	.343"	.460"	7	S				500
3/4"	6234	1.505"	NA	NA	.343"	.460"	7	S			V	500
7/8"	6235	1.565"	NA	NA	.375"	.510"	8	S			V	500
1"	8084	1.695"	NA	NA	.375"	.490"	9	S				500
1"	6334	1.695"	NA	NA	.375"	.490"	9	S			V	500
1 1/8"	7061	1.695"	NA	NA	.375"	.490"	9	S				500

*All dimensions shown are in inches unless otherwise stated and are subject to engineering tolerances.*