




JET FAST COMPANY., LIMITED.
Jet Fast Co., Ltd. was established in 1979






Standard Starlocks are available in Spring or Stainless Steel.
 Non standards may be subject to minimum order quantity.

Spring Steel Finishes: Blue & Varnish (BV) or Mechanical Zinc Plated (DT).

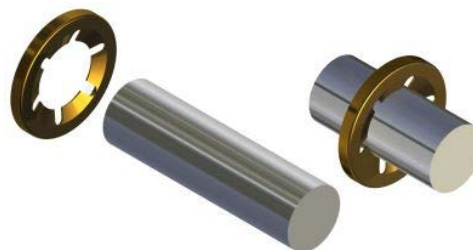Stainless Steel: Self Colour



Starlock® Push On Fasteners for Imperial Round Shafts

Shaft Size inch	Uncap Part#	No of Legs	Capped Part#	Cap Size	Outer dia inch	Material Thickness	Approx push on force kg	Approx pull off force kg	Standard	Box QTY	Picture
1/16"	6218	4	6232	1	.382"	.008"	4	20	V	10000	
1/16"	6488	4	N	N	.252"	.008"	20	40		10000	
3/32"	5883	4	6221	1	.382"	.008"	5	20	V	10000	
3/32"	6330	4	N	N	.252"	.008"	20	40		10000	
.104"	6823	4	N	N	.382"	.008"	12	20		10000	
1/8"	5897	4	6222	1	.382"	.008"	12	20	V	10000	
1/8"	7025	4	N	N	.252"	.008"	20	40		10000	
.144"	6833	4	N	N	.382"	.008"	12	40		10000	
5/32"	5928	5	6223	2	.452"	.008"	7	40	V	10000	
5/32"	6707	5	N	N	.375"	.008"	7	40		10000	
3/16"	5920	6	6224	2	.452"	.008"	6	40	V	10000	
3/16"	9018	6	N	N	.382"	.008"	15	40		10000	
3/16"	6500	6	N	N	.452"	.012"	22	100		10000	
3/16"	8058	6	N	N	.452"	.016"	40	125		10000	



JET FAST COMPANY., LIMITED.
Jet Fast Co., Ltd. was established in 1979



Standard Starlocks are available in Spring or Stainless Steel.
 Non standards may be subject to minimum order quantity.

Spring Steel Finishes: Blue & Varnish (BV) or Mechanical Zinc Plated (DT).
 Stainless Steel: Self Colour



Starlock® Push On Fasteners for Imperial Round Shafts

Shaft Size inch	Uncap Part#	No of Legs	Capped Part#	Cap Size	Outer dia inch	Material Thickness	Approx push on force kg	Approx pull off force kg	Standard	Box QTY	Picture
3/16"	7127	6	N	N	.602"	.010"	11	80		5,000	
3/16"	6718	6	N	N	.726"	.012"	12	100		2,000	
7/32"	6324	6	6235	2	.452"	.008"	13	40	V	10000	
7/32"	6934	6	N	N	.602"	.010"	22	80		5,000	
7/32"	7108	6	N	N	.726"	.012"	15	80		2,000	
1/4"	5873	6	6225	3	.602"	.010"	11	80	V	5,000	
1/4"	7068	6	N	N	.602"	.014"	30	150		5,000	
1/4"	8052	6	N	N	.602"	.016"	40	180		5,000	
1/4"	7029	6	N	N	.726"	.012"	16	100		2,000	
1/4"	8010	6	N	N	.985"	.010"	11	80		1,000	
1/4"	8181	6	N	N	.452"	.008"	20	80		1,000	
9/32"	6326	6	6236	3	.602"	.010"	20	80	V	5,000	
9/32"	6937	6	N	N	.726"	.010"	13	100		2,000	
9/32"	6938	6	N	N	.985"	.010"	20	80		1,000	




JET FAST COMPANY., LIMITED.
Jet Fast Co., Ltd. was established in 1979




Standard Starlocks are available in Spring or Stainless Steel.
 Non standards may be subject to minimum order quantity.

Spring Steel Finishes: Blue & Varnish (BV) or Mechanical Zinc Plated (DT).
 Stainless Steel: Self Colour

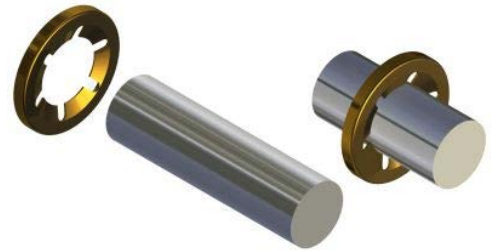

Starlock® Push On Fasteners for Imperial Round Shafts

Shaft Size inch	Uncap Part#	No of Legs	Capped Part#	Cap Size	Outer dia inch	Material Thickness	Approx push on force kg	Approx pull off force kg	Standard	Box QTY	Picture
9/32"	7136	6	N	N	1.44"	.010"	15	80		1,000	
5/16"	5821	6	6226	3	.602"	.010"	22	80	V	5,000	
5/16"	7037	6	N	N	.602"	.012"	22	80		5,000	
5/16"	8063	6	N	N	.602"	.016"	40	180		5,000	
11/32"	6332	6	6238	4	.726"	.012"	17	100	V	2,000	
11/32"	7109	6	N	N	.985"	.012"	17	100		1,000	
.365"	6213	6	N	N	.726"	.012"	20	140		2,000	
3/8"	6020	6	6227	4	.726"	.012"	21	100	V	2,000	
3/8"	6931	6	N	N	1.629"	.020"	50	385		5,000	
13/32"	6331	6	N	N	.726"	.012"	17	100		2,000	
13/32"	7110	6	N	N	.985"	.012"	15	200		1,000	
7/16"	6216	6	6228	5	.985"	.016"	15	250	V	1,000	
7/16"	6494	6	N	N	.726"	.012"	42	100		2,000	
1/2"	6143	6	6229	5	.985"	.016"	35	250	V	1,000	



JET FAST COMPANY., LIMITED.
Jet Fast Co., Ltd. was established in 1979



Standard Starlocks are available in Spring or Stainless Steel.
 Non standards may be subject to minimum order quantity.

Spring Steel Finishes: Blue & Varnish (BV) or Mechanical Zinc Plated (DT).
 Stainless Steel: Self Colour



Starlock® Push On Fasteners for Imperial Round Shafts

Shaft Size inch	Uncap Part#	No of Legs	Capped Part#	Cap Size	Outer dia inch	Material Thickness	Approx push on force kg	Approx pull off force kg	Standard	Box QTY	Picture
17/32"	6325	6	N	N	.985"	.016"	60	250		1,000	
5/8"	6185	6	6231	5	.985"	.016"	61	250	V	1,000	
5/8"	6720	6	N	N	.985"	.008"	11	60		1,000	
3/4"	6322	9	6234	7	1.44"	.016"	16	350	V	1,000	
3/4"	6323	9	N	N	1.44"	.008"	10	100		1,000	
7/8"	6328	9	6335	8	1.50"	.018"	46	350	V	1,000	
1"	6329	9	6334	9	1.629"	.020"	72	385	V	1,000	
1"	8150	9	N	N	1.629"	.012"	18	250		1,000	
1-1/8"	7061	9	N	N	1.629"	.020"	120	385		1,000	

The Starlock® Push On Fastener is a precision pressing used on plain shafts of steel, non ferrous or plastic where a quick, permanent and efficient means of assembly is required.

Starlock® eliminate costly threading and grooving operations, facilitate rapid assembly, and once fixed in position, are so secure that they cannot be removed without destruction.

Supplied in spring steel and stainless steel, Starlock® are manufactured to TS16949 in the United Kingdom by Baker & Finmore Limited (BAK-FIN) located for over 150 years in the heart of England (Birmingham), next to the Jewellery Quarter.

Special parts on application.